



eDrive +2.0
With 3 phase pre-wired option.



Specifications

Openers for Roller Shutters *e*

New!

| Model | kW | Amps | hp | Volts | Phase | Max. Door Size | IP | Duty | Included | | Upgrade | | | Notes |
|-----------|------|------|-----|-------|-------|----------------|----|------|--------------|----------------------------|---------|----------------|--------------|-------|
| | | | | | | | | | C10A Control | Smoke Baffle Functionality | Logic | Remote GPS15RK | Smoke Baffle | |
| ML5053 | 0.37 | 1.55 | 0.5 | 415 | 3 | 18 | 44 | LC | ✓ | | U | U | U | |
| ML5103 | 0.75 | 2.3 | 1 | 415 | 3 | 36 | 44 | LC | ✓ | | U | U | U | |
| ML5103SBF | 0.75 | 2.3 | 1 | 415 | 3 | 36 | 44 | LC | ✓ | ✓ | U | U | | |
| ML5153 | 1.1 | 2.55 | 1.5 | 415 | 3 | 50 | 44 | LC | ✓ | | U | U | U | |
| MH5103 | 0.75 | 1.95 | 1 | 415 | 3 | 30 | 44 | HC | ✓ | | U | U | U | |

Possible suffix combinations for the part numbers above are C, CN, CP, N, NW, P, PW, W. All openers are left or right hand specific. When ordering please specify an "L" or an "R" at the end of every part number (eg to order an ML5053 with clutch and pre-wired in left hand configuration then order a ML5053CPL)

| | | | | | | | | | | | | | | |
|-----------|------|------|-----|-----|---|----|----|----|---|---|---|---|---|--|
| ML5051 | 0.37 | 3.4 | 0.5 | 240 | 1 | 18 | 44 | LC | ✓ | | U | U | U | |
| ML5102 | 0.75 | 6 | 1 | 240 | 1 | 36 | 44 | LC | ✓ | | U | U | U | |
| ML5102SBF | 0.75 | 6 | 1 | 240 | 1 | 36 | 44 | LC | ✓ | ✓ | U | U | | |
| MH5102 | 0.75 | 4.35 | 1 | 240 | 1 | 30 | 44 | HC | ✓ | | U | U | U | |

Possible suffix combinations for the part numbers above are C, W. All openers are left or right hand specific. When ordering please specify an "L" or an "R" at the end of every part number (eg to order an ML5051 with clutch in left hand configuration then order a ML5051CL)

✓ = Included - U = Upgrade Available

* Size refers to the maximum roller door size in sqm. Light commercial openers are not recommended for roller shutters

Remote Upgrade GPS15RK **Logic Upgrade** See page 11.

| Model | Options | | | | Notes |
|--------|-------------------|--------|------------|-----------|-------|
| | Waterproof (IP55) | Clutch | No Neutral | Pre-Wired | |
| ML5053 | ✓ | ✓ | ✓ | ✓ | |
| ML5103 | ✓ | ✓ | ✓ | ✓ | |
| ML5153 | ✓ | ✓ | ✓ | ✓ | |
| MH5103 | ✓ | ✓ | ✓ | ✓ | |
| ML5051 | ✓ | ✓ | | | |
| ML5102 | ✓ | ✓ | | | |
| MH5102 | ✓ | ✓ | | | |

Opener Kits for Roller Shutters *e*

| Model | kW | Amps | hp | Volts | Phase | Size* | IP | Duty | C10A Control | Logic E21D41 | Notes |
|-------------------|------|------|-----|-------|-------|-------|----|------|--------------|--------------|-------|
| ML5103RO (L or R) | 0.75 | 2.3 | 1.0 | 415 | 3 | 36 | 44 | LC | ✓ | U | |
| ML5102RO (L or R) | 0.75 | 6.0 | 1.0 | 240 | 1 | 36 | 44 | LC | ✓ | U | |

✓ = Included - U = Upgrade Available


Kit includes GPS15RK (1 set of GPS15 beams and install brackets with 2 x E945G 3 button keyring remotes)

GRIFCO® eDrive +2.0 Logic, Safety & Wireless Accessory Selection Guide


eDrive +2.0 is wireless accessory ready straight out of the box!



Extra
Functionality

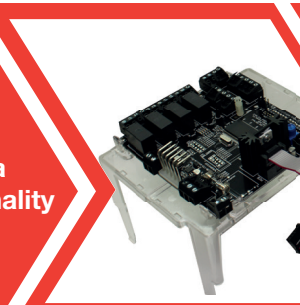

EB1 – Expansion Board
(with high lid)

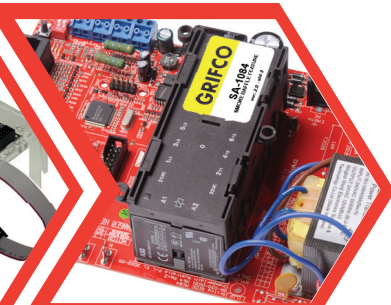

MCB with Smoke Baffle
Functionality

Choose Your Control



C10A-4 Standard
Controller (Included with
eDrive+2.0)



C21B – With Basic Key
Isolator



C43B – With Lockwood
Key Isolator



C21D-2 With Auto/Man
Key Switch

Choose Your Safety System



GPS15 15m Reflective IR Beams
GPS15RK includes 2 x E945G



GPS772 15m Send/Recv IR Beams
GPS772RK includes 2 x E945G



GLCPS – Light Curtain System

Choose Your Wireless Accessories



E945G Key Ring
Remote



E943G Forklift/Wall
Remote



E138G Wireless Wall
Control



E840G Wireless Keypad



STAR1000EVO -
Transmitter Management
System